

EKT-152

SPECIFICATION


- POWER SUPPLY: 220V, 50/60HZ, 3-PHASE;
400V, 50/60HZ, 3-PHASE
- MAX. POWER CONSUMPTION: 2.42kW
- CONVEYOR SPEED: MAX. 17.5M/MIN
- TUNNEL INLET: 500MM (W) X 250MM (H)

FEATURE

- ADJUSTABLE INLET HEIGHT
- ADJUSTABLE AIR FLOW
- ADJUSTABLE BELT SPEED
- TUNNEL CONVEYOR WITH TURNING OR FIXED SILICON COATED ROLLERS
- EAZY LCD OPERATION PANEL

OPTION

- ADJUSTABLE FAN SPEED

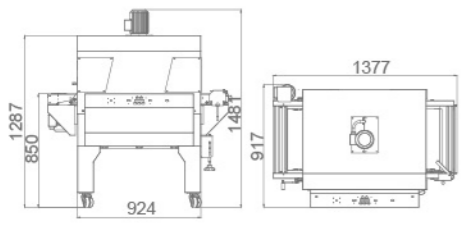

EXTEND

EKT-152D

SPECIFICATION


- POWER SUPPLY: 220V, 50/60HZ, 3-PHASE;
400V, 50HZ, 3-PHASE
- MAX. POWER CONSUMPTION: 4.35kW
- CONVEYOR SPEED: MAX. 30.5M/MIN
- TUNNEL INLET: 500MM (W) X 250MM (H)

FEATURE

- DUAL FAN CHAMBER
- ADJUSTABLE INLET HEIGHT
- ADJUSTABLE AIR FLOW
- ADJUSTABLE BELT SPEED
- TUNNEL CONVEYOR WITH TURNING OR FIXED SILICON COATED ROLLERS
- EAZY LCD OPERATION PANEL

OPTION

- ADJUSTABLE FAN SPEED

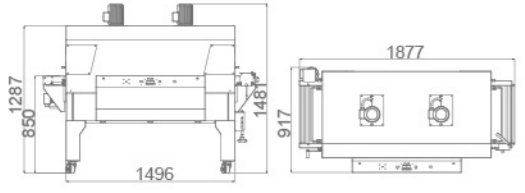

EKL/EKT SERIES

EXTEND THE PARTNERSHIP

EXTEND GREAT INTERNATIONAL CORP.

20F., NO. 309, Sec. 2, TAIWAN BLVD.,
TAICHUNG, TAIWAN, R.O.C.

T 886-4-2326-5568
F 886-4-2326-2268

www.extendgroup.com.tw
extend@extendgroup.com.tw

EKL-145M

SPECIFICATION


- POWER SUPPLY: 220-240V, 50/60HZ, 1-PHASE
- MAX. POWER CONSUMPTIO: 3.16kW
- SEALING DIMENSION: 400MM X 550MM
- MAX. PRODUCT HEIGHT: 200MM
- MAX.FILM ROLL DIMENSION: ϕ 300MM X 600MM
- CONVEYOR SPEED: 25.5M/MIN

FEATURE

- AUTOMATIC PRODUCT TRANSPORT
- ADJUSTABLE SEALING LINE BY CRANK HANDLE
- EAZY LCD OPERATION PANEL

OPTION

- MOTORIZED FILM WASTE WINDER

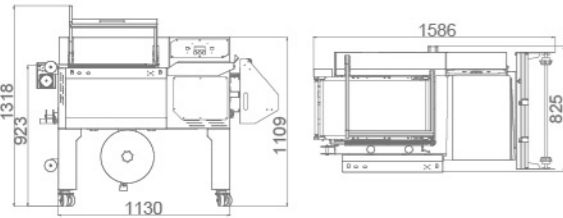

EKL-145A



SPECIFICATION


- POWER SUPPLY: 220V/380V/400V/415V, 50/60HZ, 3-PHASE
- MAX. CONSUMPTION POWER: 2kW
- AIR CONSUMPTION: 5-6KG/CM², 250L/MIN
- CONVEYOR SPEED: INFEED 21M/MIN
OUTFEED 19M/MIN
- AVERAGE OUTPUT UP TO 45 PPM
(DEPENDS ON L-BAR OPENING POSITION AND PACKAGE LENGTH.)
- SEALING DIMENSION: 450MM (L) X 450MM (W)
- MAX. PACKAGE DIMEISION: 450MM (L) X 350MM (W) X 150MM (H)
- MAX. SEALING HEIGHT: 200MM (H)
- MIN. SEALING HEIGHT: 5MM (H)
- MAX. FILM WIDTH: 600MM
- WORKING HEIGHT: 850MM +/- 50MM

OPTION

- KISSING BELT FOR SHORT LENGTH PACKAGE
- MOTORIZED CENTER SEALING HEIGHT ADJUSTMENT
- TOUCH SCREEN CONTROL PANEL

FEATURE

- CE SAFETY GUARDING
- EASY FILM LOADING
- FRONT & REAR EXCESS FILM LENGTH ADJUSTMENT
- HORIZONTAL OR VERTICAL PHOTO EYE FOR SHORT PACKAGE
- ADJUSTABLE L-BAR OPENING POSITION
- PTFE COATED SEALING BLADE
- SEPARATE SEALING BLADE TEMP. ADJUSTMENT

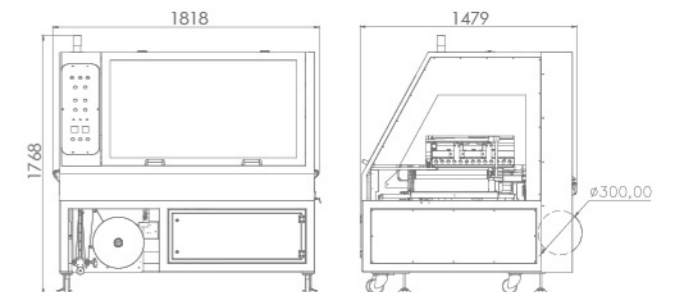

EKL-145E

SPECIFICATION

- POWER SUPPLY: 220-240V, 50/60HZ, 1-PHASE
- MAX. POWER CONSUMPTIO: 3.16kW
- SEALING DIMENSION: 400MM X 550MM
- MAX. PRODUCT HEIGHT: 200MM
- MAX.FILM ROLL DIMENSION: ϕ 300MM X 600MM
- CONVEYOR SPEED: 25.5M/MIN

FEATURE

- MOTORIZED SEALING BAR
- AUTOMATIC PRODUCT TRANSPORT
- ADJUSTABLE SEALING LINE BY CRANK HANDLE
- EAZY LCD OPERATION PANEL

OPTION

- MOTORIZED FILM WASTE WINDER

